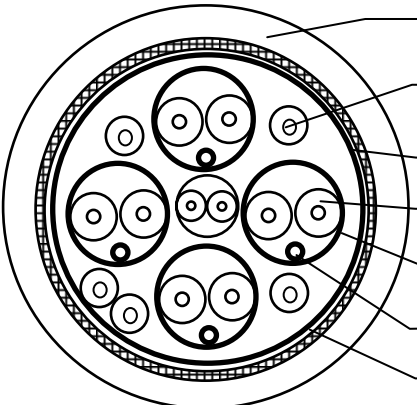


SPECIFICATION:		(1P*24#+D+Free-edge-AL)*4C+1P*24#+5C*24#+AL+B UL20276		CONSTRUCTION D.W.G																	
ITEM		SPECIFICATION																			
CONDUCTOR	AWG	24AWG	24AWG																		
	MATERIAL	Silver-Coated Copper OFC	TINNED COPPER OFC																		
	COND.SIZE	7/0.20± 0.008 mm	7/0.20± 0.008 mm																		
INSULATION	MIN.AVG.THICK	0.45 mm	0.15 mm																		
	MATERIAL	FM-PE + SKIN	PP																		
	O . D	1.55 ± 0.07 mm	0.96 ± 0.05 mm																		
DRAIN	N O.	1P*4	1P+5C																		
	AWG	24AWG	/																		
	MATERIAL	TINNED COPPER OFC	/																		
Face Inside Free-edge-AL	SIZE	7/0.20± 0.008 mm×1PC	/																		
	COVERAGE	100%	/																		
	OVERLAP	25% MIN	/																		
Mylar	COVERAGE	/	/																		
	OVERLAP	/	/																		
	NO.	4P	1P+5C																		
Face Outside AL.MYLAR	COVERAGE	100%																			
	OVERLAP	25% MIN																			
BRAID COPPER	MATERIAL	TINNED COPPER OFC																			
	SIZE	24*9/0.12± 0.008 mm																			
JACKET	MIN.AVG.THICK	0.51 mm																			
	MATERIAL	HALF MATT CL2 PVC																			
	COLOUR	CL2-813 BLACK LOW TOXIC																			
	O . D	9.50 ± 0.15 mm																			
				COLOUR CODE:																	
				(1P+D+Free-edge.AL)*4C: CORE: 1.WHITE* BROWN 2.WHITE* RED 3.WHITE* GREEN 4.WHITE* BLUE 1P*24AWG: 5.YELLOW*ORANGE 5C*24AWG: 6.PURPLE 7.RED 8.WHITE 9.PINK 10.GRAY																	
				MARKING																	
				Blue Jeans Cable Parallel Digital Video Cable – Series 2 – HDMI - E139956 (UL) CL2 75°C 24AWG SPC AWM Style 20276 80°C 30V VW-1																	
				REMARK																	
				WHITE MARKING																	
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES OF JACKET		<table border="1"> <tr> <td colspan="4">BLUE JEANS CABLE</td> </tr> <tr> <td>APPROVED</td> <td></td> <td>MODEL NO.</td> <td>6184724106</td> </tr> <tr> <td>CHECKED</td> <td></td> <td>REV</td> <td>A</td> </tr> <tr> <td>DRAWING</td> <td>LXY</td> <td>DATE</td> <td>2006/2/3</td> </tr> </table>		BLUE JEANS CABLE				APPROVED		MODEL NO.	6184724106	CHECKED		REV	A	DRAWING	LXY	DATE	2006/2/3
BLUE JEANS CABLE																					
APPROVED		MODEL NO.	6184724106																		
CHECKED		REV	A																		
DRAWING	LXY	DATE	2006/2/3																		
1.Rating : TEMP 80°C : VOLTAGE 30V		1.Tensile Strength: Unaged: 1500PSI min Aged: 70% min																			
2.Conductor Resistance: AT 20°C MAX 24AWG:93.25Ω/km;		2. Elongation: Unaged: 100% min Aged: 65%																			
3.Fext<-26dB		3. Heat shock test: NO CRACKING																			
4.Impedance: 100±10Ω		4. Cold bend test: NO CRACKING																			
5.Attenuation : at 0.3~825MHz<8dB/10m; at		5. Deformation test: MAX 50%																			
0.825~2.475GHz<21dB/10m at 2.475~4.125GHz<30dB/10m.		6. Flame test: PASS VW-1																			
6.Time Delay Skew: within a pair ≤ 300ps/10M;																					
between pairs: ≤ 2.42ns/10m																					
*These data are limited to raw cable.																					